


ChemStar Mechanical Packing, Inc.

Address: 3010 Reynolds Rd
Lakeland, FL 33803 USA
Office: (863) 425-5581 / (800) 397-5581
Fax: (863) 425-5762
Email: sales@chemstarpacking.com
Website: www.chemstarpacking.com



STYLE 1152

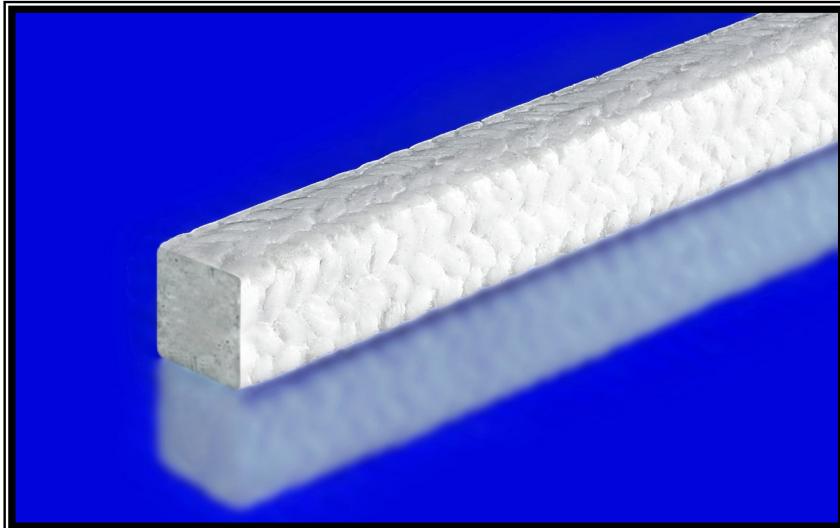

- **Temperature:** To 500°F / 260°C
- **pH Range:** 0-12
- **Speed:** 2200 FPM
- **Pressure:** 500 PSI / 35 Bar
- **Construction:** Interlock Braid

Description: *Syntex fiber with each strand impregnated with PTFE dispersion both prior to and after braiding. Finished packing also has a break-in lube.*

Equipment: *Rotating & reciprocating pumps, agitators, valves, expansion joints and other rotating equipment*

Applications: *Mild acids & caustics, brine, gases, oils, steam, non-abrasive water, general chemical plant applications*

Industries: *General industry, Marine, Pulp & Paper, Agriculture, Oil & Gas, Power generation, Municipal / Water & Wastewater plants, Mining and Oil fields*