


## **ChemStar Mechanical Packing, Inc.**

**Address:** 3010 Reynolds Rd  
Lakeland, FL 33803 USA  
**Office:** (863) 425-5581 / (800) 397-5581  
**Fax:** (863) 425-5762  
**Email:** sales@chemstarpacking.com  
**Website:** www.chemstarpacking.com



### **STYLE 165K**

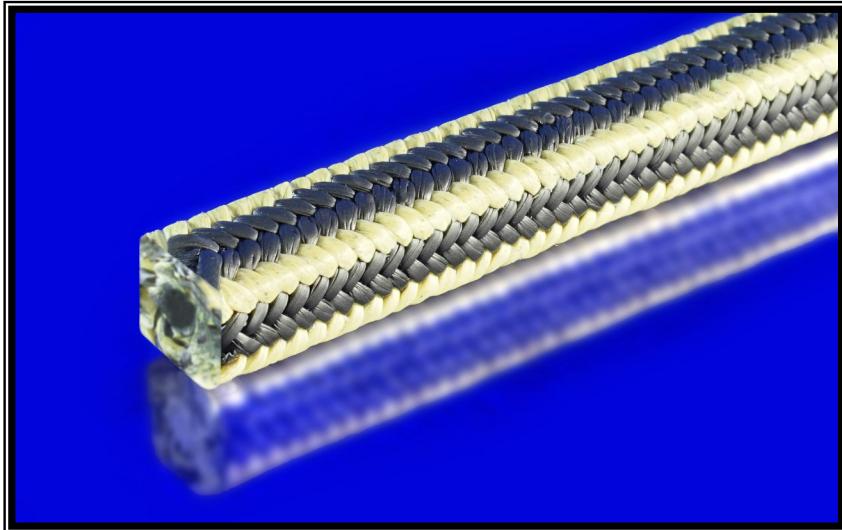

- **Temperature:** To 550°F / 285°C
- **pH Range:** 2-12
- **Speed:** 2500 FPM
- **Pressure:** 300 PSI / 20 Bar
- **Construction:** Interlock Braid

**Description:** Graphite filled PTFE fiber with aramid corners to prevent roll and extrusion

**Equipment:** Pump, valve, agitator, mixer, drier, refiner and rotating & reciprocating

**Applications:** Abrasives, asphalt, condensate, fly ash, liquors, medium acids & medium caustics, oils, paper stock, solvents, slurries, solvents, water, and wastewater

**Industries:** Chemical & Pharmaceutical, Mining & Minerals, Municipal/Wastewater, Oil & Gas, Power generation, Pulp & Paper mills and Steel & Metals